

${\it Impact Multi-Track Sliding Glass Door System} \quad {\it SI8200HP}$


SI8201 • SI8202 • SI8203



Series SI8200 HP hurricane impact, thermally enhanced, muilt-track sliding door system for commercial and residential applications. Multiple sill options provide outstanding performance and design versatility. Telescoping sliding door system provides operability to open up entire exterior elevations, even in extreme weather-prone environments.



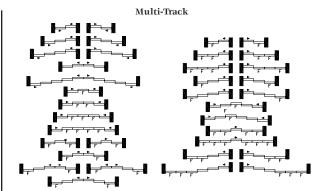

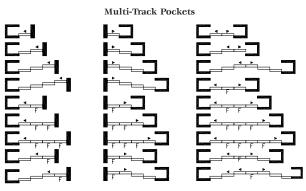

Features:

- Florida impact approved product; FL 12280.1
- Weather tight jamb interlock provides air and water performance
- Monolithic and insulated impact glazing infills up to 1"
- · Standard finishes
 - Duracron: Hartford Green, Bronze, Black, Natural Clay, White, Sandstone
- Multiple hardware options and finishes
- Maximum tested panels size 4' x 8'
- Multiple roller sizes allow oversized panels*
- LEED friendly system including recycled content
- Designed and manufactured in the U.S.A.

Options:


- Radius units possible (SI8203*)
- No post 90 degree corners possible (SI8202*)
- Pocket sliding: single or double sided*
- Custom finishes
 - Class I anodized: Dark Bronze, Clear
 - Powder Coat Finish: AAMA 2604-05
 - Fluoropolymer: 50% or 70%
 - Veneer & cladding options
- Decorative interior and exterior low profile grids
- Insect screen options: sliding, retractable
- Screen motorizations available upon request



*Configurations have not been tested. Project specific testing is possible. INNOVATIO

SI8200HP Impact Multi-Track Sliding Glass Door System

SI8201 • SI8202 • SI8203

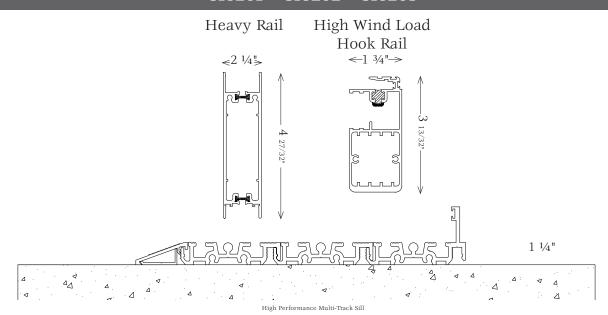

Hardware Options



Interior Exterior Recessed Thumb Turn CA, DBA



Interior Exterior Screen & Door Recessed Option B, A


Non-coastal



Exterior **Ergonomic** W, B, ORB, BC



Edge Pull Pocket Doors Only All Standard SI Colors

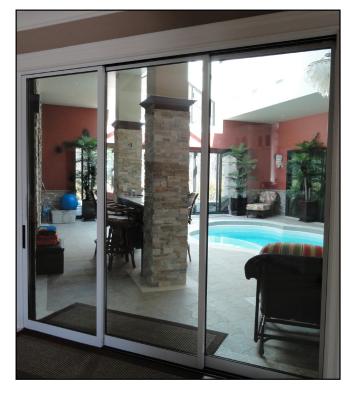



Exterior Allure BN ONLY



Wire Pull

Custom hardware and colors available at www.solarinnovations.com; custom colors available for an additional charge.

Sliding Door Rollers Stainless Steel

Florida Impact Performance Test #110-10818-2						
Panel Size	# Panels	DP (psf)	Certification	Air@ (1.57psf)	Water (psf)	Glass Selection
48' x 96'	Up to 5	± 60	FL 12280.1	.12	6.0	Monolithic 7/16" HS (3/16 over 3/16.075 Vanceva Inner Layer) Insulated 1 1/16" HS (3/16 Tempered over 7/16 HS .075 Vanceva Inner Layer)



1 13/16" Roller (Approximate Size) Precision bearings.



3" Roller (Approximate Size) Precision bearings.



1 1/4" Roller (Approximate Size) Screens and Windows



Testing and performance results may vary depending upon sill and hardware selections. Please be sure to visit our web site for additional product information.