

PROJECT ID: 13-01-340

Location: Cincinnati, Ohio

Completion Date: April 2013

Glass Square Footage: 385

Number of Panels: 12

Approximate Largest Panel Size:

Width 3' 3"

Height 9' 0"

Features:

148° No Post Slide & Stack System

24' Track Length


G2 Standard Thermal Framing

Dust Proof Floor Strikes

180° Two Point Locking System

Class I Clear Anodized Frame Finish

Clear Insulated Glazing

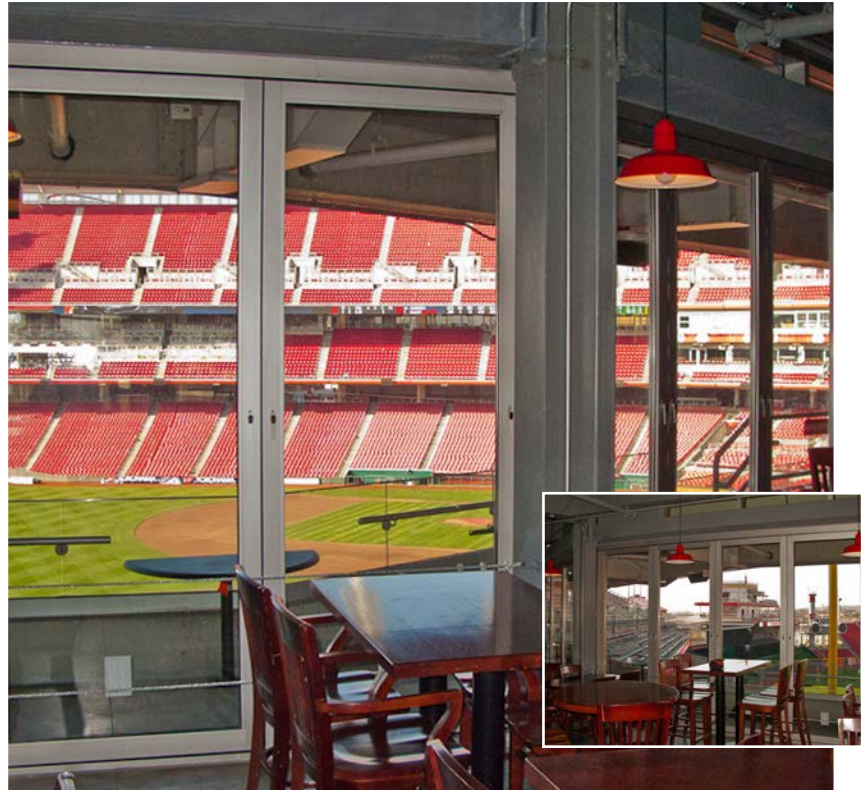

PROJECT ID: 12-11-318

Location: Edina, Minnesota

Completion Date: August 2013

Glass Square Footage: 222

Number of Panels: 6

Approximate Largest Panel Size:

Width 3' 10"

Height 10' 3"

Features:

2 Slide & Stack Systems

7' - 15' Track Lengths


G2 Standard Thermal Framing

Recessed Ramp Sill

Allegro Handle

Dark Bronze Anodized Frame Finish

Clear Insulated Glazing

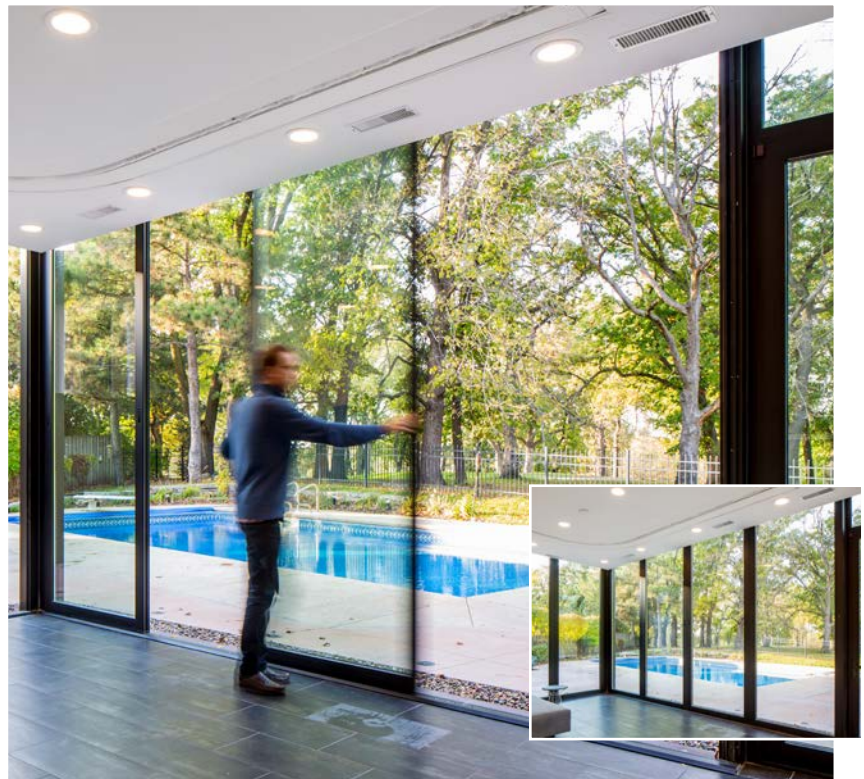

PROJECT ID: 14-02-336

Location: Dorchester, Massachusetts

Completion Date: April 2015

Glass Square Footage: 932

Number of Panels: 28

Approximate Largest Panel Size:

Width 2' 5"

Height 7' 7"

Features:

1 Slide & Stack System

30' - 44' Track Lengths

G2 Standard Non-Thermal Framing

Dust Proof Floor Strikes

Panic Hardware

Class I Clear Anodized Frame Finish

Clear Monolithic Glazing



PROJECT ID: 14-02-024

Location: Horse Shoe, North Carolina

Completion Date: October 2016

Glass Square Footage: 260

Number of Panels: 9

Approximate Largest Panel Size:

Width 3' 6"

Height 8' 3"

Features:

1 Slide & Stack System

15' - 20' Track Lengths

G2 Standard Thermal Framing

Dust Proof Floor Strikes

AAMA 2603 Bronze Frame Finish

LoE 272 Insulated Glazing

