


SI8000 G3 Sliding Doors – Water Performance


THERMALLY IMPROVED

Exterior Interior

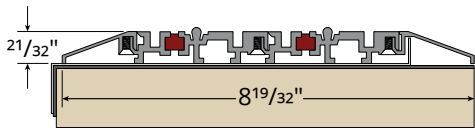


G3 Sliding Thermal Sill — 5/8" Flat Sill With No Up Leg
Limited/no expected field water performance

Exterior Interior

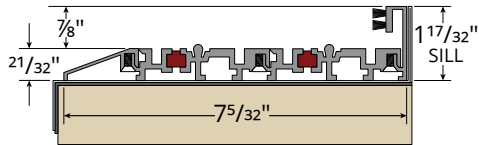


G3 Sliding Thermal Sill — 1 17/32" Up Leg
4.5PSF expected field water performance

Exterior Interior

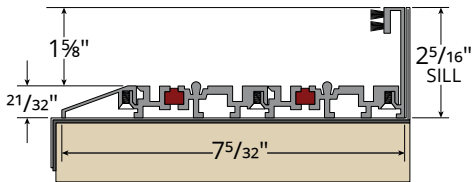


G3 Sliding Thermal Sill — 2 5/16" Up Leg
8.4PSF expected field water performance

Exterior Interior

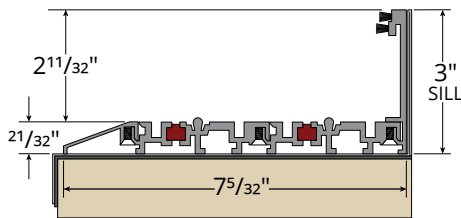


G3 Sliding Thermal Sill — 3" Up Leg
12PSF expected field water performance

Exterior Interior

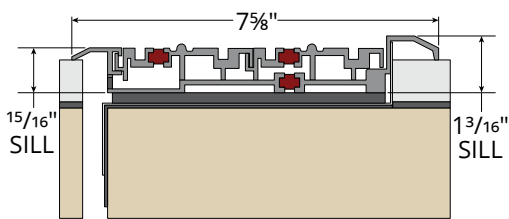

G3 Sliding ADA Sub Sill
3-4PSF expected field water performance
Can use exterior weep flaps or drain tubes
ADA compliant


Exterior Interior

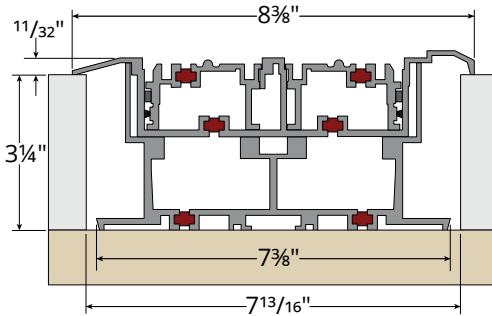

ADA Tank Sill
12PSF expected field water performance
Can use exterior weep flaps or drain tubes
ADA compliant


NON-THERMAL

Exterior Interior

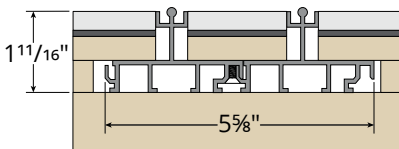

G3 Sliding Non-Thermal Tile Sill
Limited/no expected field water performance
Interior applications only
ADA compliant

Exterior Interior

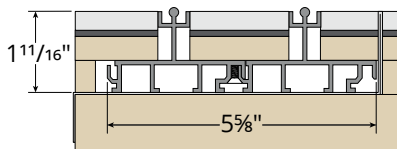

G3 Sliding Non-Thermal Tile Sill
5.2PSF expected field water performance
Sill pan required for water performance
ADA compliant

Please note: only standard sill and up leg options are shown. Other variations are available upon request.