

SLIDING GLASS DOOR SYSTEMS



Effortlessly expand your living space to the outdoors

Sliding Glass Door Systems allow for expansive views and create easy access to the outdoors or transitions between two interior spaces. Motorization options, pocketing possibilities, countless configurations, and gigantic panel sizes make our Sliding Glass Doors a flexible design element that complements any space. For completely unobstructed views, pockets can be designed into the system, that allow the doors to be tucked away within the wall cavity while fully opened. Pet and insect screen systems can be integrated into the design to keep insects where they belong — outside!

FEATURES

PANELS

- Motorized panels and screens possible with wireless remote, keypad, motion sensor, or infrared sensor controls available
- LEED friendly system including recycled content
- Designed and manufactured in the U.S.A.

PERFORMANCE:

- Weather-tight jamb interlock provides outstanding air and water performance

GLAZING:

- Designed to accommodate almost any glazing infill including glass and solid-panel infills from 1/4" to 1 3/8"

HARDWARE

- Custom manufactured operable hardware
- Multiple hardware styles and finishes
- Multiple sill designs, including high performance sill
- Stainless steel rollers with precision bearings
 - 3" rollers for minimum panel width of 30"
 - 1 13/16" rollers for minimum panel width of 20"
- Smaller panels may be available upon engineering approval

OPTIONS

FINISHES:

- Standard finishes:
 - AAMA 2603: Black, White, Sandstone, and Bronze
 - AAMA 611 Class I Anodized: Clear, Dark Bronze
- Designer finishes:
 - AAMA 2604: Black, White, Sandstone, Natural Clay, and Bronze
- Custom finishes:
 - Powder coat finish: AAMA 2604, 2605
 - Fluoropolymer (50% or 70%): AAMA 2604, 2605
 - Faux wood
- Dual finish — interior/exterior applications

OPTIONS:

- Matching fixed transoms & sidelites
- Screen options: folding, sliding, retractable
- Mullions, decorative muntins, simulated divided lites (SDLs), interior & exterior grids
- No post 90° corners possible
- Pocketing options: single or double sided
- Factory installed sill drain tubes, if required

HARDWARE

Handles


STANDARD

Ergonomic



STANDARD RECESSED

Recessed Flush Lock

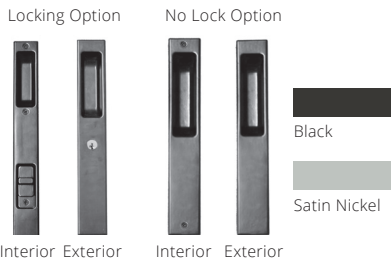

PULLS

GeoMetek



BandWidth



POCKET DOOR

Edge Pull



Pocket Doors Only Available in Clear and Dark Bronze Anodized Finish

COASTAL RECESSED

Recessed Thumb Turn



Rollers



1 13/16" Stainless Steel Wheels Roller WITH STAINLESS STEEL PRECISION BEARINGS G2 ONLY



3" Nylon Wheels Roller WITH STAINLESS STEEL PRECISION BEARINGS



3" Stainless Steel Wheels Roller WITH STAINLESS STEEL PRECISION BEARINGS

*Additional charges will apply.

Please Note: All hardware is subject to vendor availability. Custom finishes may be available upon request at additional lead time and/or cost. Solar Innovations® reserves the right to discontinue any hardware option at any time. Please be sure to visit our website for additional product information: www.solarinnovations.com

FINISH OPTIONS


Paint AAMA 2603 (5 year warranty). Finishes available while in stock.




Anodized Additional cost



Powder Coat Solids STANDARD - AAMA 2605 (10 year; up to 20 year warranty). Scratch & fade resistant; contains no VOCs.*




Powder Coat Solids PREMIUM - AAMA 2605 (10 year; up to 20 year warranty). Scratch & fade resistant; contains no VOCs.*

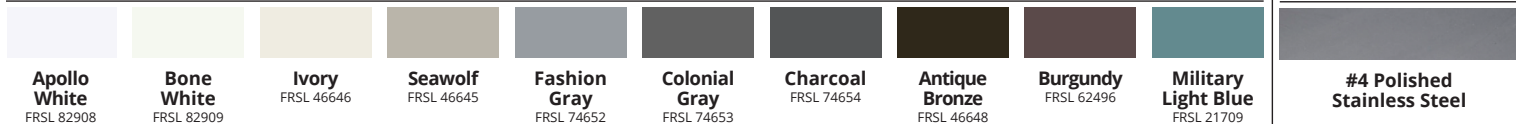

Visit <https://www.ifsc coatings.com/content/assets/Uploads/brochures/IFS-Architectural-Digital-Color-Card.pdf> for additional metallic and anodic finishes.

Decoral Finishes (Powder Coat)*

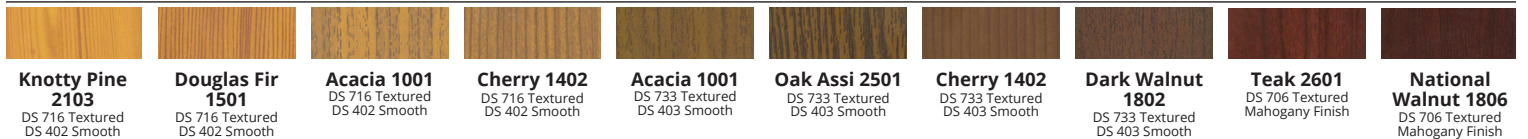


*Lead times subject to availability.


Note: Depending upon color selection, additional charges and increased lead times may apply. Extended warranties and service plans are available for an additional charge. Examples are shown as accurate as photography and printing processes allow. Final finish selection should be made from a physical sample; contact Solar Innovations® for samples. Product and finish options are subject to vendor availability. Solar Innovations® reserves the right to discontinue any option at any time without notice. Additional options, including custom color match, are available; contact Solar Innovations® for details.

CONFIGURATIONS


Additional configurations are available.

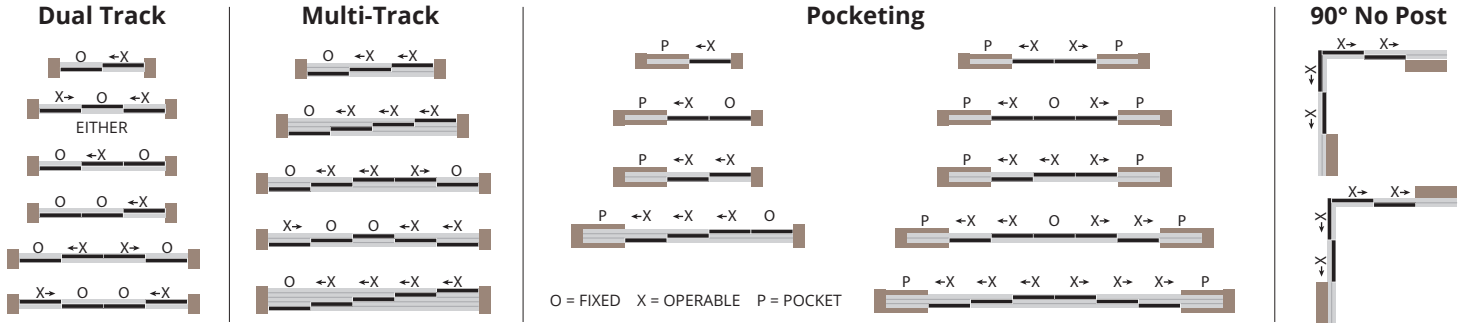


GRID OPTIONS




Arched Grid



Gothic Grid




Double Gothic Grid




Traditional Grid




Cross Grid



English Grid

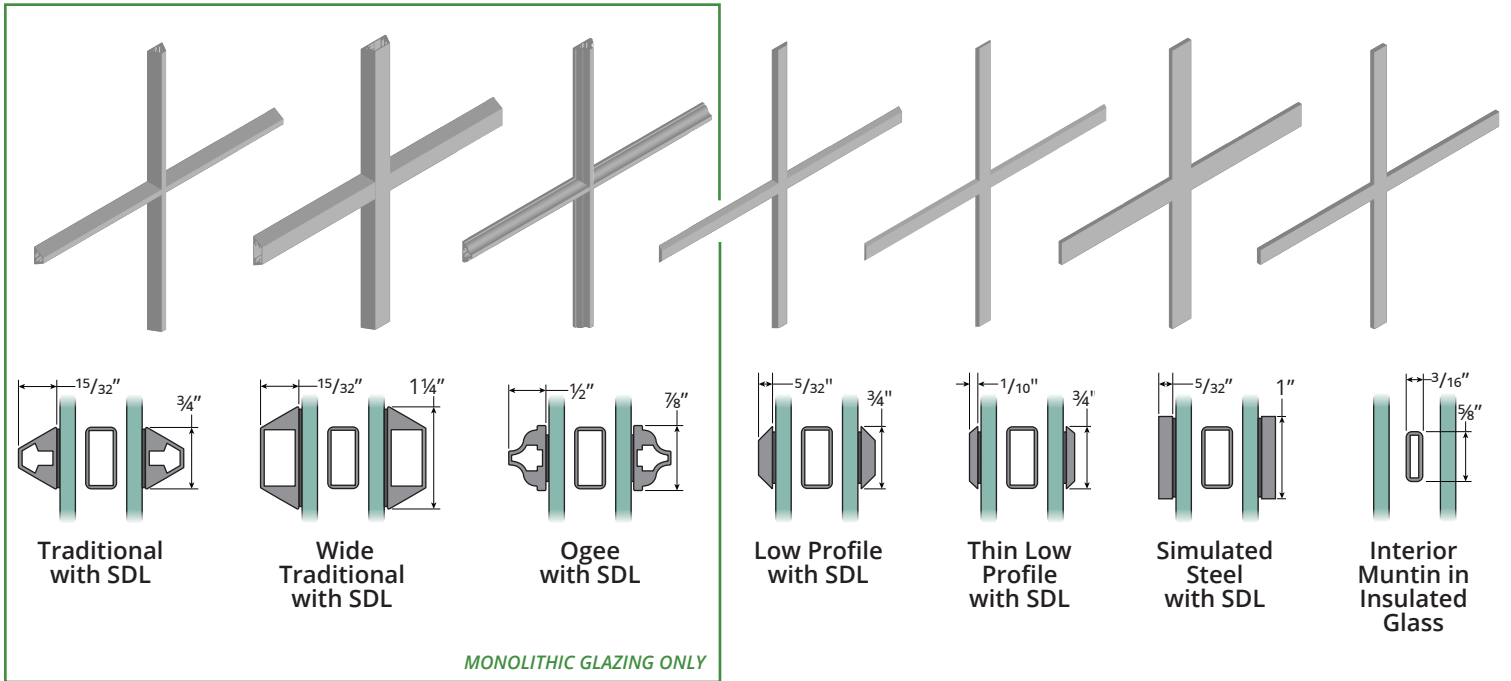

Like-sized grids can be mixed and matched, for example:



To find out more about the features and options of our Sliding Glass Doors, visit our website at solarinnovations.com/our-products/aluminum-doors/sliding-glass-doors/ or contact one of our sales designers at 800 618 0669.

G2 SLIDING GLASS DOORS



G2 System

The G2 Multi-Track Sliding Glass Door System is ideal for any commercial or residential entryway. For exterior applications, the frame can incorporate thermal breaks, that greatly reduce the heat and cold transfer from the exterior to the interior. For ease of use, our system can be motorized and even be controlled by a smart phone.

G2 Impact System

For coastal applications, our systems can be designed with high-performance sills, high-wind or hurricane hook rails and/or laminated glazing that will protect your home in extreme conditions.

G2 STC Rated System

The G2 STC-rated Multi-Track Sliding Glass Door System is ideal for any application that has Sound Transmission Class (STC) requirements. Though acoustic values are typically specific to the glazing selection, the construction of the frame can greatly influence the acoustical performance. The G2 STC-rated system combines enhanced acoustical performance, superior thermal performance, and outstanding functionality.

PLEASE NOTE: Any variation in configuration, sill, or size from tested standards will need to be tested to confirm STC rating.

Florida Impact Performance Test #110-10818-2

Panel Size	# of Panels	Design Pressure	Certification	Air at 1.57psf	Water	Glass Selection
60.5"W x 96"H	Unlimited	±65psf	FL 16028.2	0.14 CFM/FT ²	12.0psf* (Based on water column)	Monolithic 7/16" HS (3/16" over 3/16", .090 SGP Inner Layer) 1 1/16" IGU (3/16" Tempered over 7/16" Annealed Laminated (.090 SGP))

* Testing and performance results may vary depending upon sill, size, and hardware selections. Please be sure to visit our website or contact your Solar Innovations® representative for additional product information.

G2 STC Rated System Acoustical Testing

Test Report	Glazing Thickness	Glazing Makeup	STC	OITC
F3159.01	1"	¼" Annealed Exterior, ½" Air Space, ¼" Laminated Interior, Glass Temperature 75°F	33	29

Panels

- Minimum panel size: 20" wide; smaller panels may be available upon engineering approval
- Maximum panel size up to 6' x 10'; larger panel options may be available depending on application
- Motorized panels available

Glazing


- Designed to accommodate almost any monolithic, insulated, laminated, decorative, polycarbonate, or solid panel infill from ¼" to 1 1/16"

Performance


- Water performance up to 12psf, depending on sill choice, configuration, and water column
- Higher design pressure ratings available with engineering approval
- Test results available upon request

Sill Options


THERMALLY IMPROVED

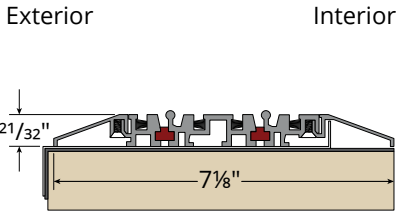


G2 Sliding Thermal Sill — 5/8" Flat Sill With No Up Leg
Limited/no expected field water performance

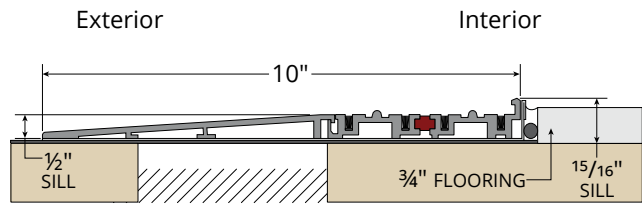


G2 ADA Sill with Interior Flooring
1-1.5PSF expected field water performance
ADA Compliant*

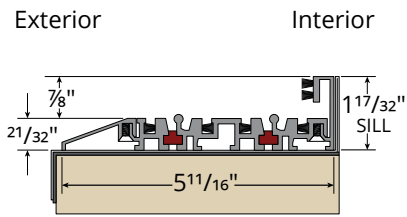

G2 Sliding Thermal Sill — 1 17/32" Up Leg
4.5PSF expected field water performance

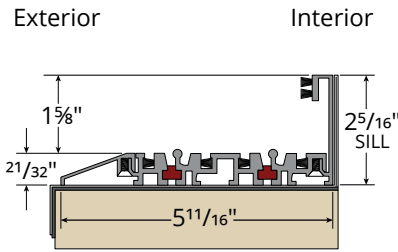


G2 Sliding Thermal Sill — 2 5/16" Up Leg
8.4PSF expected field water performance

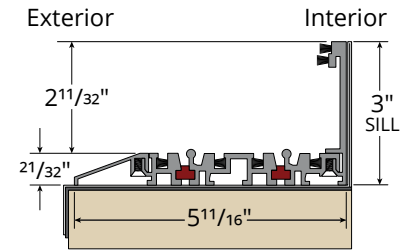


G2 Sliding Thermal Sill — 3" Up Leg
12PSF expected field water performance

* Custom order; subject to availability. Only available in Class 1 Clear Anodized finish.


NON-THERMAL

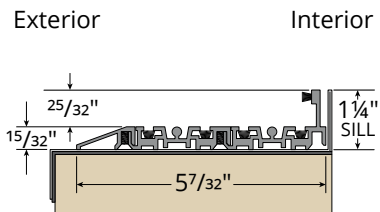


G2 Sliding Non-Thermal Sill — 1 1/4" Integrated Up Leg
4.0PSF expected field water performance
Hurricane certified

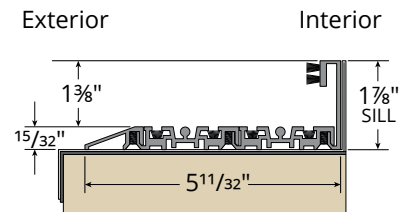

G2 Sliding Non-Thermal Sill — 1 7/8" Up Leg
7.1PSF expected field water performance
Hurricane certified

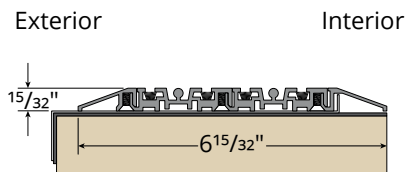

G2 Sliding Non-Thermal Sill — 1/2" Flat Sill With No Up Leg
Limited/no expected field water performance
ADA compliant

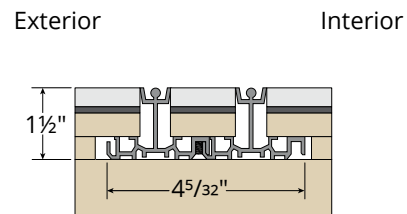


G2 Sliding Non-Thermal Tile Sill
Limited/no expected field water performance
Interior applications only
ADA compliant


Please note: only standard sill and up leg options are shown. Other variations are available upon request.

Vertical & Horizontal Rail Options


NON THERMAL




Handle Rail




Flush Rail



Hook Rail




High Wind Hook Rail




Hurricane Hook Rail


THERMALLY IMPROVED




Medium Bottom Rail




Large Bottom Rail




Handle Rail




High Wind Handle Rail




Flush Rail




Hurricane Flush Rail



Hook Rail




High Wind Hook Rail



Hurricane Hook Rail



Mullions

(True Divided Lites)





Thermally Improved Mullion

Head & Sill Detail

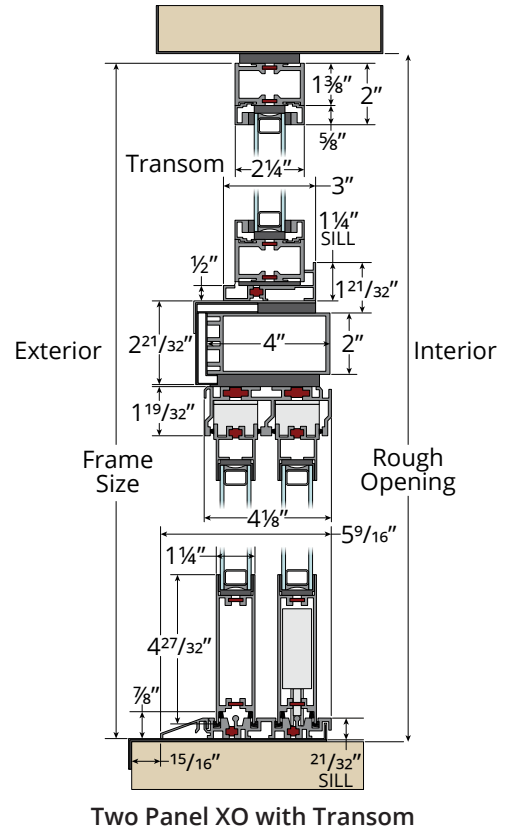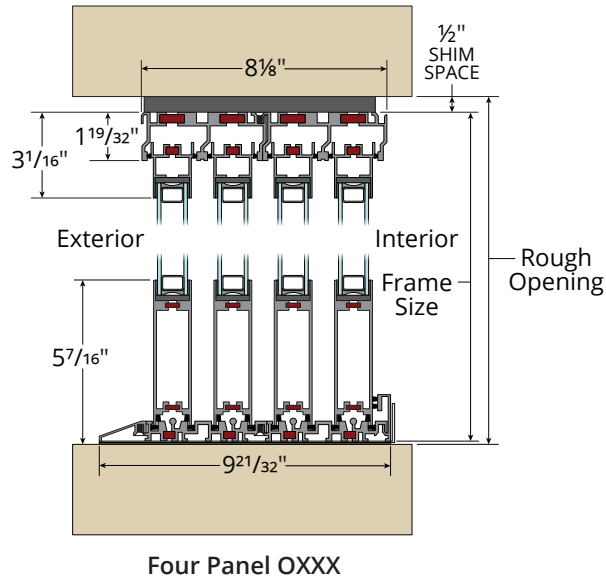

Jamb & Elevation Details

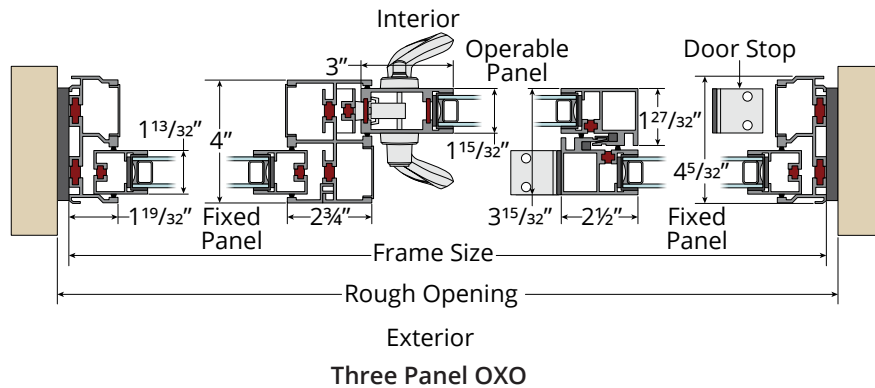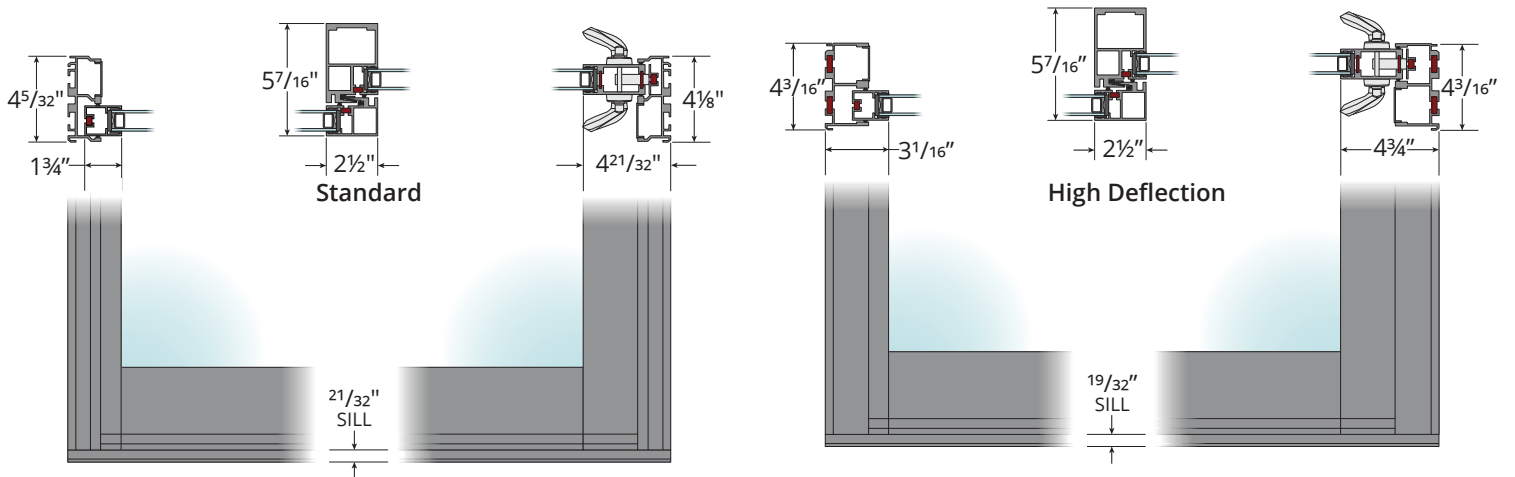

G3 SLIDING GLASS DOORS



G3 System

The G3 Multi-Track Sliding Glass Door System features all of the characteristics of our G2 system, but incorporates a heavier frame, which allows for a thicker glazing infill. This system also allows for higher wind loads and greater deflection, making for a stronger frame than its G2 counterpart.

G3 Impact System

For coastal applications, our systems can be designed with high-performance sills, high-wind or hurricane hook rails and/or laminated glazing that will protect your home in extreme conditions.

G3 STC Rated System

The G3 STC-rated Multi-Track Sliding Glass Door System is ideal for any application that has Sound Transmission Class (STC) requirements. Though acoustic values are typically specific to the glazing selection, the construction of the frame can greatly influence the acoustical performance. The G3 STC-rated system combines enhanced acoustical performance, superior thermal performance, and outstanding functionality.

PLEASE NOTE: Any variation in configuration, sill, or size from tested standards will need to be tested to confirm STC rating.

G3 System Air & Structure Impact Testing

Panel Size	Glazing	Air Infiltration at 1.57psf (25 MPH)	Water Penetration	Design Pressure	Uniform Load Structural Test	Overload	Impact & Cycling
60"W x 115"H	1¼" IGU HS (¾" Tempered Over 7/16" HS .090 SPG Inner Layer)	0.10 CFM/FT²	7.52psf (HP Sill) 10.56psf (Extra HP Sill)	+50/-70psf (HP Sill) ±70psf (Extra HP Sill)	±70psf	±105psf	±70psf

G3 STC Rated System Acoustical Testing

Test Report	Glazing Thickness	Glazing Makeup	STC	OITC
C2184.01-113-11	1¾"	¼" Laminated Over ¾" Air Space Over ¾" Laminated	42	36

* Testing and performance results may vary depending upon sill, size, and hardware selections. Please be sure to visit our website or contact your Solar Innovations® representative for additional product information.

Panels

- Minimum panel width: 30"; smaller panels may be available upon engineering approval
- Panel size up to 6' x 15'; larger panel options may be available depending on application
- Motorized panels available

Glazing

- Designed to accommodate almost any insulated, laminated, decorative, polycarbonate, or solid panel infill from 1¼" to 1¾"


Performance

- Water performance up to 12psf, depending on sill choice and configuration
- Structural tested up to a design pressure of 100psf
- Higher water and structural performance available with engineering approval

Sill Options


THERMALLY IMPROVED

Exterior Interior

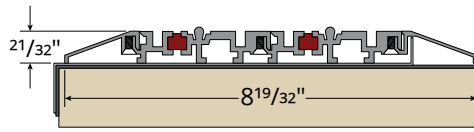


G3 Sliding Thermal Sill — 5/8" Flat Sill With No Up Leg
Limited/no expected field water performance

Exterior Interior

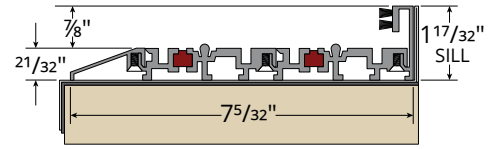


G3 Sliding Thermal Sill — 1 17/32" Up Leg
4.5PSF expected field water performance

Exterior Interior

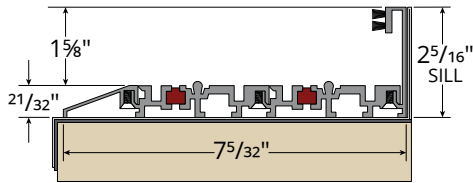


G3 Sliding Thermal Sill — 2 5/16" Up Leg
8.4PSF expected field water performance

Exterior Interior

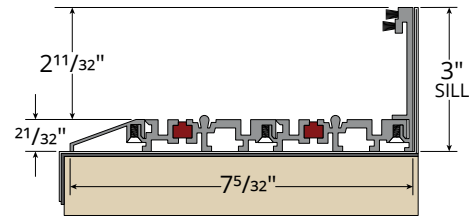


G3 Sliding Thermal Sill — 3" Up Leg
12PSF expected field water performance

Exterior Interior

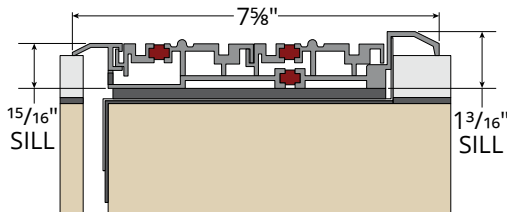


G3 Sliding ADA Sub Sill
3-4PSF expected field water performance
Can use exterior weep flaps or drain tubes
ADA compliant

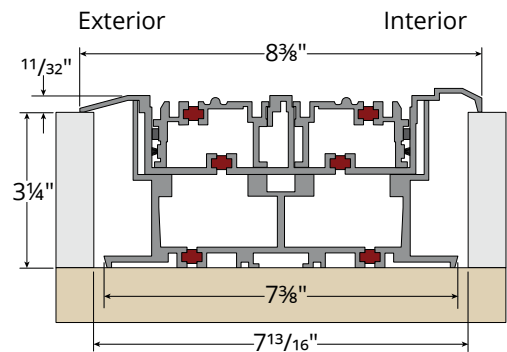

ADA Tank Sill
12PSF expected field water performance
Can use exterior weep flaps or drain tubes
ADA compliant

NON-THERMAL

Exterior Interior

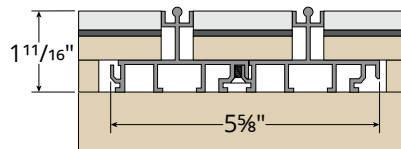


G3 Sliding Non-Thermal Tile Sill
Limited/no expected field water performance
Interior applications only
ADA compliant


Please note: only standard sill and up leg options are shown. Other variations are available upon request.

Vertical & Horizontal Rail Options

NON THERMAL

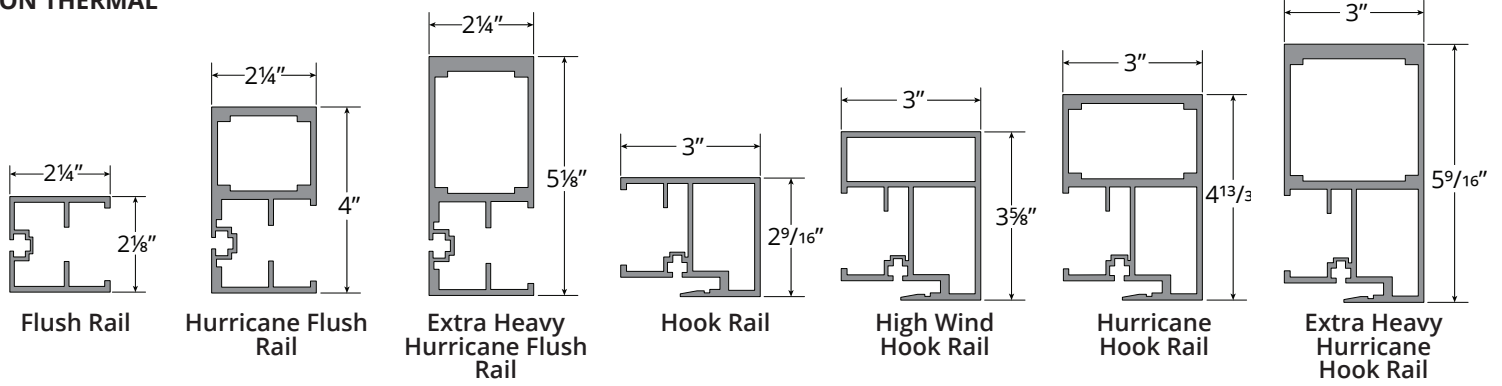


THERMALLY IMPROVED

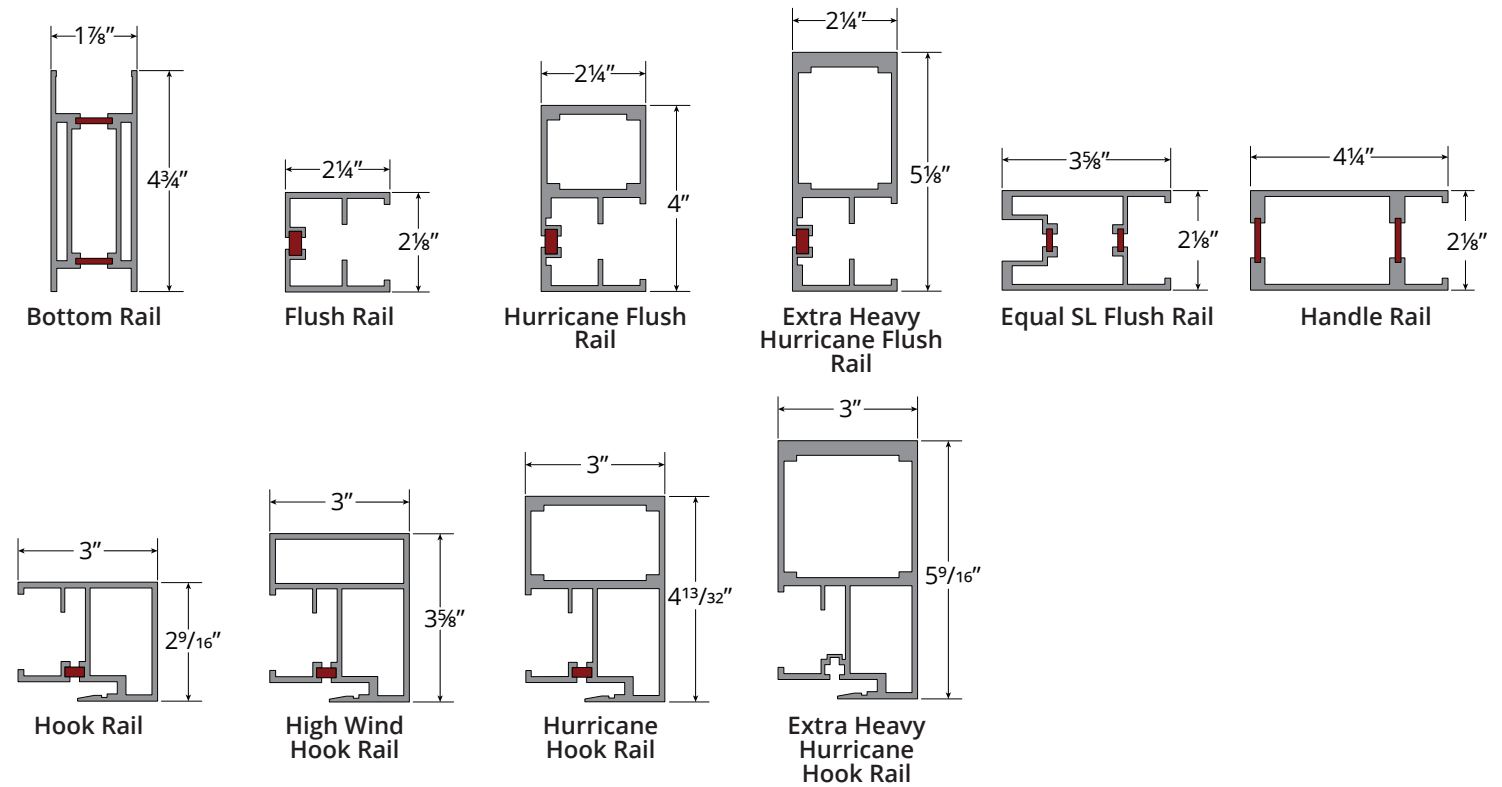

Mullions



(True Divided Lites)



Horizontal Mullion

Please note: All G3 mullions include thermal break, regardless of the system

Head & Sill Detail

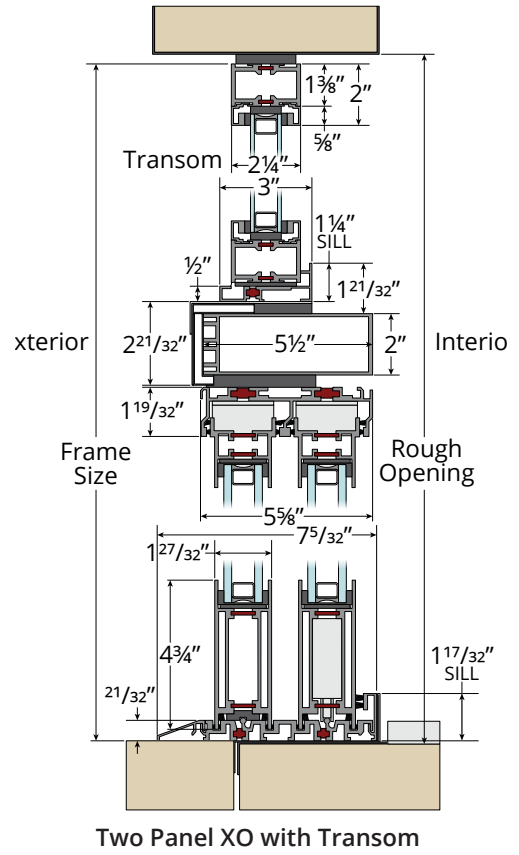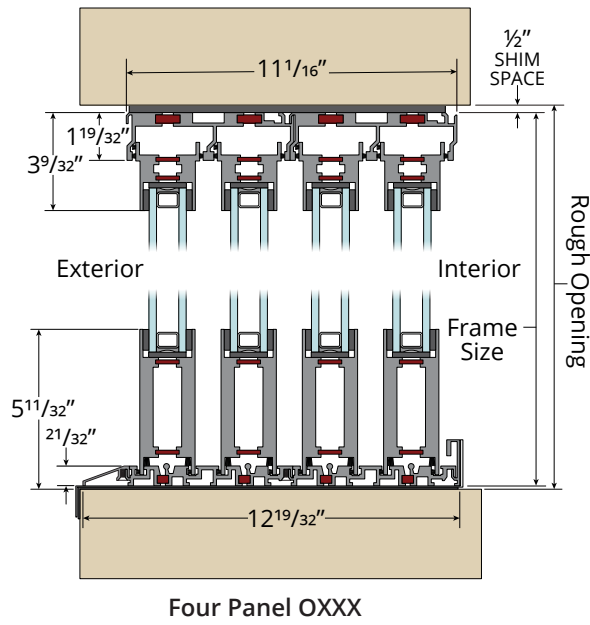

Jamb & Elevation Details

